

#2 מבנה מחשבים - תרגיל

אריאל סטורמן

קבוצה 02

(1)

$$1. \quad a + a'b + a'b'c + a'b'c'd + \dots = a + a'(b + b'(c + c'(d + \dots =$$

$$a + b + b'(c + c'(d + \dots = \dots = \mathbf{a + b + c + d + \dots}$$

$$2. \quad (x' + xyz') + (x' + xyz')(x + x'y'z) =$$

$$x' + yz' + (x' + yz')(x + y'z) = (x' + yz')(1 + x + y'z) =$$

$$\mathbf{x' + yz'}$$

$$3. \quad (x + y)(y + z) + xz' = xy + xz + yy + yz + xz' =$$

$$xy + y + x(z + z') + yz = y + x + yz = \mathbf{x + y}$$

(2)

נמצא את המשלים של הביטויים הבאים, ונצמצם את התוצאה (לא את המקור):

$$1. \quad x'(y' + z')(x + y + z'):$$

$$[x'(y' + z')(x + y + z')] = x'' + (y' + z')' + (x + y + z')' =$$

$$x + y'z' + x'y'z' = x + yz + x'y'z = x + z(y + y'x') =$$

$$x + z(y + x') = x + x'z + zy = x + z + zy = \mathbf{x + z}$$

$$2. \quad (x + yz')(y + x'z')(z + x'y'):$$

$$[(x + yz')(y + x'z')(z + x'y')] = (x + yz')' + (y + x'z')' + (z + x'y')' =$$

$$x'(y' + z') + y'(x' + z') + z'(x' + y') =$$

$$x'(y' + z) + y'(x + z) + z'(x + y) = x'y' + x'z + xy' + y'z + xz' + yz' =$$

$$y'(x' + x + z) + x'z + xz' + yz' = y' \cdot 1 + yz' + x'z + xz' =$$

$$(y' + z')(1 + y) + x'z + xz' = y' + z' + x'z + xz' =$$

$$y' + z' \cdot 1 + zx' + xz' = y' + (z' + x')(z + 1) + xz' =$$

$$y' + z' + x' + xz' = y' + z' + x' \cdot 1 + xz' =$$

$$y' + z' + (x' + z')(1 + x) = y' + z' + x' + z' =$$

$$\mathbf{x' + y' + z'}$$

$$3. \quad (a + b'c')(b + a'c')(c + a'b'):$$

$$[(a + b'c')(b + a'c')(c + a'b')] = (a + b'c')' + (b + a'c')' + (c + a'b')' =$$

$$a'(b'' + c'') + b'(a'' + c'') + c'(a'' + b'') =$$

$$a'b + a'c + ab' + b'c + ac' + bc' = \underline{ab' + a'c + b'c} + \underline{ac' + a'b + bc'} =$$

$$\mathbf{ab' + a'c + ac' + a'b}$$

(3)

$$1. \quad ab + a'b' + bc = ab + a'b' + a'c:$$

$$ab + a'b' + bc = ab + \underline{b'a'} + \underline{bc} = ab + \underline{b'a'} + bc + a'c = \underline{ab + a'c + bc} + a'b' =$$

$$\underline{ab + a'c} + a'b' = ab + a'b' + a'c \blacksquare \quad \{xy + x'z + yz = xy + x'z\}$$

2.  $xy + x'z + yz = xy + x'z$ : מיידי מהזהות לעיל, נוכיח אחרת:

x	y	z	x'	xy	x'z	yz	$xy + x'z + yz$	$xy + x'z$
0	0	0	1	0	0	0	0	0
0	0	1	1	0	1	0	1	1
0	1	0	1	0	0	0	0	0
0	1	1	1	0	1	1	1	1
1	0	0	0	0	0	0	0	0
1	0	1	0	0	0	0	0	0
1	1	0	0	1	0	0	1	1
1	1	1	0	1	0	1	1	1

→  $xy + x'z + yz = xy + x'z$  ■

3.  $xy + x'z + F(x, y, z)yz = xy + x'z$

let  $F(x, y, z) = 0$ :  $xy + x'z + F(x, y, z)yz = xy + x'z$  - מיידי

let  $F(x, y, z) = 1$ :  $xy + x'z + F(x, y, z)yz = xy + x'z + yz$  - הוכח לעיל

→  $\forall F$ :  $xy + x'z + F(x, y, z)yz = xy + x'z$  ■

דרך נוספת:

$$xy + x'z + F(x, y, z)yz = xy + x'z + yz + F(x, y, z)yz = xy + x'z + yz(1 + F(x, y, z)) \\ = xy + x'z + yz = xy + x'z + yz \quad \blacksquare$$

(4)

1.  $F(x, y, z) := (xy) \text{ XOR } (yz) \text{ XOR } (1)$

נראה כי  $\{F, 0, 1\}$  היא מערכת אוניברסלית:

נממש את  $\{\text{NOT}, \text{AND}\}$ :

$$\text{NOT}(x) := F(x, 1, 0):$$

$$F(x, 1, 0) = (x) \text{ XOR } (0) \text{ XOR } (1) = (x) \text{ XOR } (1) = x'$$

$$\text{AND}(x, y) := F(x, y, 0):$$

$$\text{NOT}(F(x, y, 1)) = \text{NOT}((xy) \text{ XOR } (y \cdot 0) \text{ XOR } (1)) = \text{NOT}((xy) \text{ XOR } (1))$$

x	y	$(xy) \text{ XOR } (1)$	$\text{NOT}((xy) \text{ XOR } (1))$	$\text{AND}(x, y)$
0	0	1	0	0
0	1	1	0	0
1	0	1	0	0
1	1	0	1	1

■  $\{F, 0, 1\}$  היא מערכת אוניברסלית ←

$$a \text{ XOR } b := F(a, 1, F(b, 1, 0)):$$

$$a \text{ XOR } b = F(a, 1, F(b, 1, 0)) = F(a, 1, b') = (a \cdot 1) \text{ XOR } (1 \cdot b') \text{ XOR } (1) =$$

$$a \text{ XOR } [b' \text{ XOR } (1)] = a \text{ XOR } (b' \cdot 0 + b' \cdot 1) = a \text{ XOR } b \quad \blacksquare$$

$$2. \quad F(w, x, y, z) = \Sigma(4, 5, 13) \rightarrow$$

#	x	y	z	w	F(x, y, z, w)
0	0	0	0	0	0
1	0	0	0	1	0
2	0	0	1	0	0
3	0	0	1	1	0
4	0	1	0	0	1
5	0	1	0	1	1
6	0	1	1	0	0
7	0	1	1	1	0
8	1	0	0	0	0
9	1	0	0	1	0
10	1	0	1	0	0
11	1	0	1	1	0
12	1	1	0	0	0
13	1	1	0	1	1
14	1	1	1	0	0
15	1	1	1	1	0

$$F(x, y, z, w) = x'yz'w' + x'yz'w + xyz'w =$$

$$x'yz'w' + yz'w(x' + x) = x'yz'w' + yz'w =$$

$$yz'(x'w' + w) = yz'(w + x') = \mathbf{x'yz' + yz'w}$$

נראה כי  $\{F, 1\}$  היא מערכת אוניברסלית:

נממש את  $\{NOT, AND\}$ :

$$\underline{NOT(x) := F(x, 1, x, 1):}$$

$$F(x, 1, x, 1) = x' \bullet 1 \bullet x' + 1 \bullet x' \bullet 1 = x'x' + x' = \mathbf{x'}$$

$$\underline{AND(x, y) := F(F(x, 1, x, 1), y, F(x, 1, x, 1), 1):}$$

$$F(F(x, 1, x, 1), y, F(x, 1, x, 1), 1) =$$

$$F(x', y, x', 1) = x'yx' + yx' \bullet 1 =$$

$$xyx + yx = xy + xy = \mathbf{xy}$$

■  $\{F, 1\}$  היא מערכת אוניברסלית ←

3.

נתונות הפונקציות:

$$f1(x, y, z) = (x'y) \text{ XOR } (xy) \text{ XOR } (yz) \text{ XOR } (y'z')$$

$$f2(x, y, z) = (x) \text{ XOR } (y) \text{ XOR } (z)$$

ניצור בעזרתן את הפונקציה:

$$g(x, y, z) = xyz' + xy'z + x'yz + x'y'z'$$

$$\underline{f1(x, y, z)} = [(x'y) \text{ XOR } (xy)] \text{ XOR } [(yz) \text{ XOR } (y'z')] = [(x'y)(xy)' + (x'y)'(xy)] \text{ XOR}$$

$$[(yz)(y'z')' + (yz)'(y'z')] = [x'y(x' + y') + xy(x + y')] \text{ XOR } [yz(y + z) + y'z'(y' + z')]$$

$$= [x'yx' + x'yy' + xyx + xyy'] \text{ XOR } [yzy + yzz + y'z'y' + y'z'z'] =$$

$$[x'y + xy] \text{ XOR } [yz + y'z'] = y \text{ XOR } (yz + y'z') = y(yz + y'z')' + y'(yz + y'z') =$$

$$y(yz)'(y'z')' + y'yz + y'y'z' = y(y' + z')(y + z) + y'z' = yz'(y + z) + y'z' =$$

$$yz'y + yz'z + y'z' = yz' + y'z' = z'(y + y') = \mathbf{z'}$$

$$\underline{f2(x, y, z)} = [(x) \text{ XOR } (y)] \text{ XOR } (z) = [x'y + xy'] \text{ XOR } (z) = z'(x'y + xy') + z(x'y + xy')'$$

$$= x'yz' + xy'z' + z(x'y)'(xy')' = x'yz' + xy'z' + z(x + y')(x' + y) =$$

$$x'yz' + xy'z' + z(xx' + xy + x'y' + yy') = \mathbf{x'yz' + xy'z' + xyz + x'y'z}$$

$$\underline{g(x, y, z) := f2(x, y, f1(x, y, z))}:}$$

$$f2(x, y, f1(x, y, z)) = f2(x, y, z') = x'yz'' + xy'z'' + xyz' + x'y'z' =$$

$$xyz' + xy'z + x'yz + x'y'z' \quad \blacksquare$$

נתונה הפונקציה:

$$F(W, X, Y, Z) = X'W(Y'Z + X') + [X(XOR)Y]$$

נמצא לה הצגה קנונית לפי SOP ו-POS.

תחילה נפשט את הפונקציה:

$$F(w, x, y, z) = x'w(y'z + x') + (x) XOR (y) = x'wy'z + x'wx' + xy' + x'y = x'wy'z + x'w + xy' + x'y$$

#	w	x	y	z	x'	y'	x'wy'z	x'w	xy'	x'y	F(w, x, y, z)
0	0	0	0	0	1	1	0	0	0	0	0
1	0	0	0	1	1	1	0	0	0	0	0
2	0	0	1	0	1	0	0	0	0	1	1
3	0	0	1	1	1	0	0	0	0	1	1
4	0	1	0	0	0	1	0	0	1	0	1
5	0	1	0	1	0	1	0	0	1	0	1
6	0	1	1	0	0	0	0	0	0	0	0
7	0	1	1	1	0	0	0	0	0	0	0
8	1	0	0	0	1	1	0	1	0	0	1
9	1	0	0	1	1	1	1	1	0	0	1
10	1	0	1	0	1	0	0	1	0	1	1
11	1	0	1	1	1	0	0	1	0	1	1
12	1	1	0	0	0	1	0	0	1	0	1
13	1	1	0	1	0	1	0	0	1	0	1
14	1	1	1	0	0	0	0	0	0	0	0
15	1	1	1	1	0	0	0	0	0	0	0


SOP:  $F(w, x, y, z) = \Sigma(2, 3, 4, 5, 8, 9, 10, 11, 12, 13) =$

$$w'x'yz' + w'x'yz + w'xy'z' + w'xy'z + wx'y'z' + wx'y'z + wx'yz' + wx'yz + wxy'z' + wxy'z$$


POS:  $F(w, x, y, z) = \Pi(0, 1, 6, 7, 14, 15) =$

$$(w+x+y+z) (w+x+y+z') (w+x'+y'+z) (w+x'+y'+z') (w'+x'+y'+z) (w'+x'+y'+z')$$

$F(x, y, z) = (xy'z) XOR (x+y+z')$ :

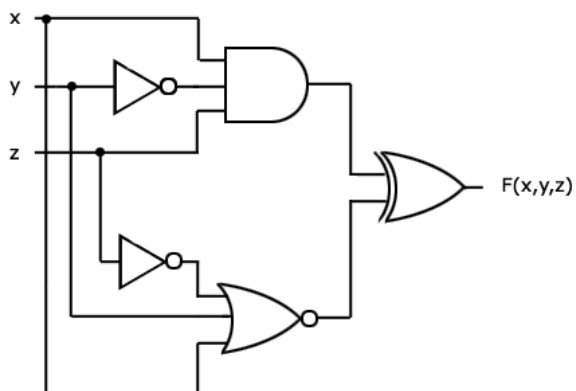

$$F(x, y, z, w) = (x'y'z + xyzw' + x'z')'$$

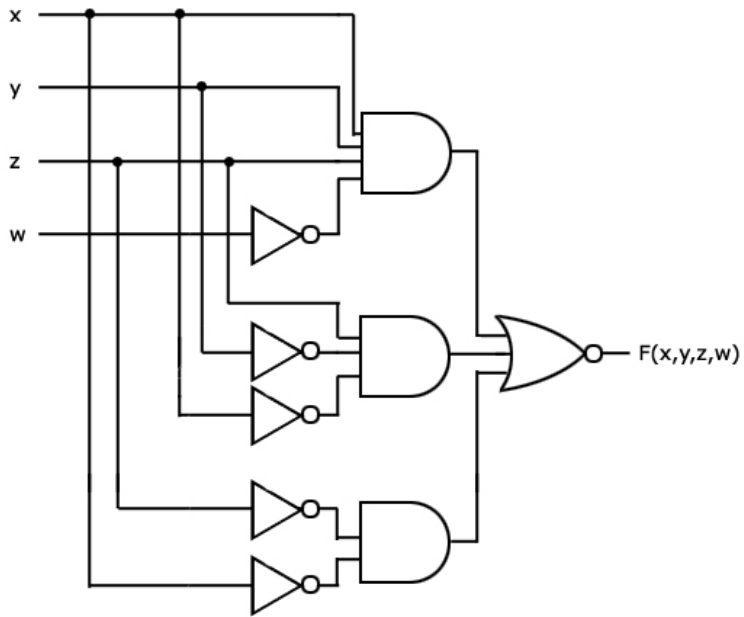

$$F(x, y, z, w) = (x + y + z')(x' + y' + w)z + (xy + z)'$$

